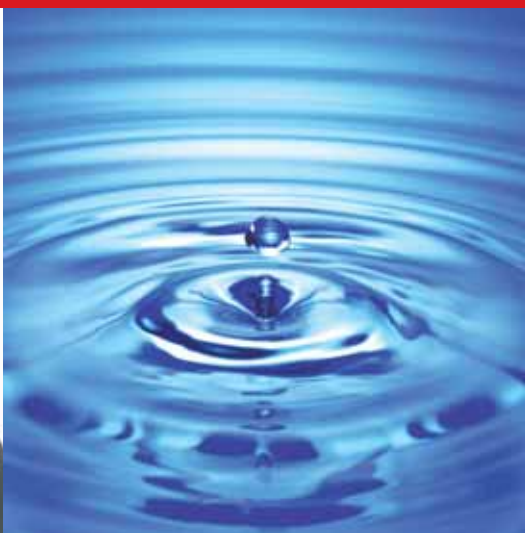


PVC CEVI ZA VODOVOD



PVC CEVI ZA VODOVOD

Hakan PVC cevi pod pritiskom za pitku vodu (visokog kvaliteta) su proizvedene u skladu sa standardima TS 274-2 EN 1452-2, DIN 8061, DIN 8062.

Ove cevi prenose vodu, omogućavaju vam brigu o zdravlju i otporne su na podzemne uslove.

Cevi ne zadržavaju taloge svojom glatkom unutrašnjom površinom.

Ne stvaraju bakterije niti neprijatne mirise.

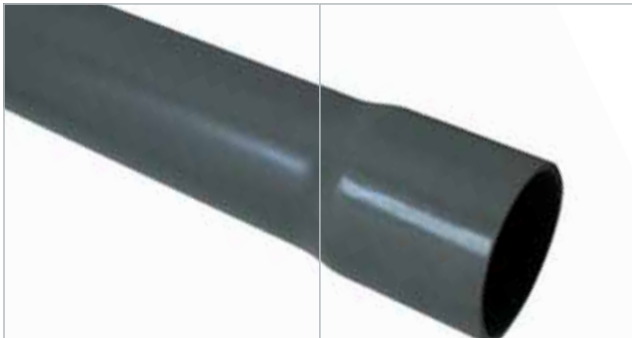

Cevi koje imaju spoljni prečnik od 32-40-50mm su spojene razblaženim cementom, a one spoljnjeg prečnika 63-500mm su sa spojnicama i standardnih dužina 6 metara (osim sa muf spojnicom).

Različite dužine su dostupne na zahtev.

Otpornost na hemikalije

Hemikalije	20 °C	50 °C
Sirćetna kiselina	D	D
Petrolej	D	D
Hlorovodonik	D	D
Nitrit kiselina	D	SD
Sumporna kiselina	D	D

D – otporan SD – ograničena otpornost

	Metoda spajanja - industrijski lepak
	Metoda spajanja - zaptivna gumica

PVC CEVI ZA VODOVOD



PN6 PVC-U CEVI

SPOLJNI PREČNIK (mm)	DEBLJINA
50	1.5
63	1.9
75	2.2
90	2.7
110	2.7
125	3.1
140	3.5
160	4.0
200	4.9
225	5.5
250	6.2
280	6.9
315	7.7
355	8.7
400	9.8
450	11.0
500	12.3

PN10 PVC-U CEVI

SPOLJNI PREČNIK (mm)	DEBLJINA
32	1.6
40	1.9
50	2.4
63	3.0
75	3.6
90	4.3
110	4.2
125	4.8
140	5.4
160	6.2
200	7.7
225	8.6
250	9.6
280	10.7
315	12.1
355	13.6
400	15.3
450	17.2
500	19.1

PN16 PVC-U CEVI

SPOLJNI PREČNIK (mm)	DEBLJINA
32	2.4
40	3.0
50	3.7
63	4.7
75	5.6
90	6.7
110	6.6
125	7.4
140	8.3
160	9.5
200	11.9
225	13.4
250	14.8
280	16.6
315	18.7
355	21.1
400	23.7
450	26.7
500	29.7

GUMICE

SPOLJNI PREČNIK (mm)
63
75
90
110
125
140
160
200
225
250
280
315
355
400
450
500





Sertifikati kvaliteta



SKALA



Milutina Milankovića 1C ♦ Tel: 011/311-4534; 011/311-0812
e-mail: office@skala-m.rs ♦ www.skala-m.rs

